
Designing Solar Thermal Systems for Selected Industrial Applications



Stefan Hess

Fraunhofer Institute for
Solar Energy Systems ISE

International Training Seminar
Solar Process Heat (So-Pro)
Intersolar Europe, 9 June 2011

www.ise.fraunhofer.de

© Fraunhofer ISE



Agenda

- Background and motivation
- The SO-PRO Design Guide
 - Structure and application of the guide
 - Important terms and values
 - Holistic planning approach
- Example: System design for a washing process
 - Pre-dimensioning with rules of thumb
 - Making use of simulated nomograms
- Explanation of the other system designs and processes
- Exercises: Teamwork and discussion of results
- Summary

2

© Fraunhofer ISE



Agenda

■ Background and motivation

- The SO-PRO Design Guide
 - Structure and application of the guide
 - Important terms and values
 - Holistic planning approach
- Example: System design for a washing process
 - Pre-dimensioning with rules of thumb
 - Making use of simulated nomograms
- Explanation of the other system designs and processes
- Exercises: Teamwork and discussion of results
- Summary


3

Industrial process heat: demand and potential

- Industrial process heat accounts for more than 20 % of the final energy demand (in Germany, similar for EU 25)
- A significant share of 33 % is needed at temperatures below 150 °C

Huge potential:

- **Germany:** ca. 16 TWh (3,1 % of industrial heat demand) = 36 Mio. m² (450 kWh / (m²*a)) [1]
- **EU 25:** ca. 70 TWh = 155 Mio. m² [1] (overall installed collector area in EU 27, 2009: ca. 46 Mio. m² [2])

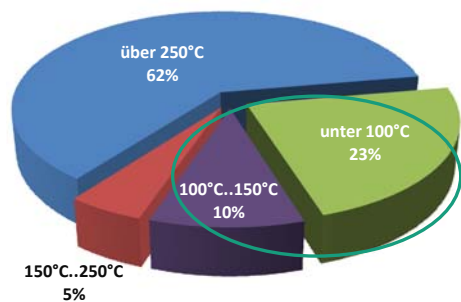

Demand per temperature range (Germany) [1]

[1] C. Lauterbach et al. 2010: Potential of Solar Process Heat in Germany. Uni Kassel

[2] W. Weiß et al., 2011: Solar Heat Worldwide Report 2009. AEE INTEC

4

Reality and obstacles

- In 2010 only about 200 solar process heat systems (ca. 42 MW_{th} or 60.000 m²) in operation were reported worldwide (incl. space heating) [3].
- But solar thermal process heat shows remarkable growth rates especially in China, India, Middle East and Austria [2].



Source: Sotec Solar, Germany

Obstacles:

- Financial restrictions (payback < 5 years)
- Complex system integration, high planning effort, lack of standardized solutions, “missing links” between industrial process planners, energy consultants and solar companies
- Priority of energy efficiency measures

[3] W. Weiß, 2010: Speech at Intersolar Conference Solar Process Heat. IEA Task 33/IV and research of AEE INTEC

5

Agenda


- Background and motivation
- **The SO-PRO Design Guide**
 - Structure and application of the guide
 - Important terms and values
 - Holistic planning approach
- Example: System design for a washing process
 - Pre-dimensioning with rules of thumb
 - Making use of simulated nomograms
- Explanation of the other system designs and processes
- Exercises: Teamwork and discussion of results
- Summary

6

SO-PRO Design Guide [4]

- Objective: provide „missing links“ between process planners, energy consultants and solar companies
- Design principles for four selected applications:
 - Heating of hot water for washing or cleaning
 - Heating of make-up water for open steam networks
 - Heating of baths or vessels
 - Convective drying with hot air
- Holistic planning approach with consecutive steps

[4] S. Heß et al. 2010:
www.solar-process-heat.eu/guide

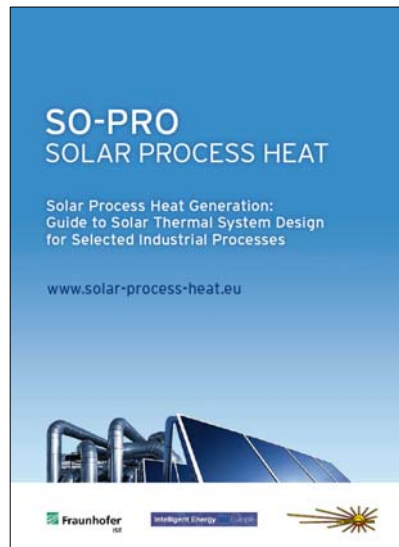

7

© Fraunhofer ISE

 **Fraunhofer**
ISE

Important terms and values

- Heat demand:
 - Thermal load: demand per day or year
 - Load profile: daily, weekly and annual variation of the heat demand
 - Available temperature level: temperature level at the heat integration point (low temperatures are often favorable)
- Support of open or closed processes:
A process is open, if the medium to be heated is not circulated.
- Directly or indirectly heated processes:
Heat supply to the process via heat exchanger is indirect.
The supply is direct, when the heat carrier is consumed by the process.
- Integration on process- or supply level:
On the process level the solar heat is supporting a process, on the supply level the ST-system is supporting a hot water or steam network.



Source: Fraunhofer ISE

8

© Fraunhofer ISE

 **Fraunhofer**
ISE

Holistic planning approach – consecutive steps

- **Pre-analysis:** building and boundary conditions
 - Checklists, phone calls (www.solar-process-heat.eu/checklist)
 - What is / could be the motivation of the company ?
- Analysis of **process characteristics** and **heat distribution network**
 - Site visit with technician, sketch of the building
 - Temperature levels, condition of heat distribution network
 - Open / closed processes, direct / indirect heat integration, heat integration at process level or supply level (heat distribution network)
 - Process-schemes, load profiles, installation of measuring equipment
- **Process optimization** and **energy efficiency measures** [5]
 - Processes state-of-the-art? Future plans?
 - Heat exchanger optimization (pinch analysis)



➔ **Consider these issues before designing a solar thermal system!**

[5] C. Brunner et al. 2010: IEE-Project Einstein: www.iee-einstein.org


9

Agenda

- Background and motivation
- The SO-PRO Design Guide
 - Structure and application of the guide
 - Important terms and values
 - Holistic planning approach
- **Example: System design for a washing process**
 - Pre-dimensioning with rules of thumb
 - Making use of simulated nomograms
- Explanation of the other system designs and processes
- Exercises: Teamwork and discussion of results
- Summary

10


a) Heating of water for washing or cleaning

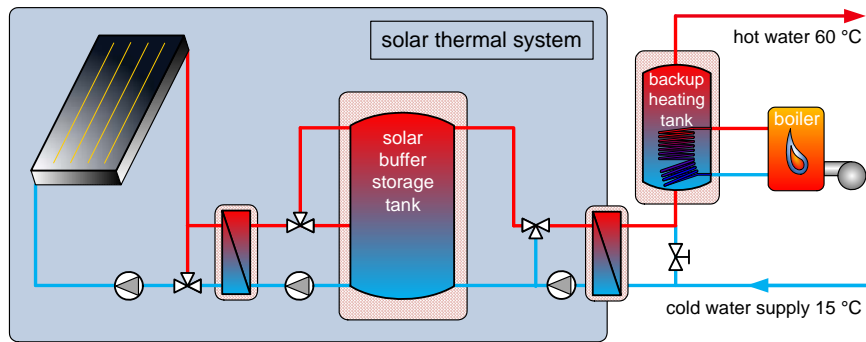

Exemplary system concept for pre-heating of hot water

11

Thermal load profile

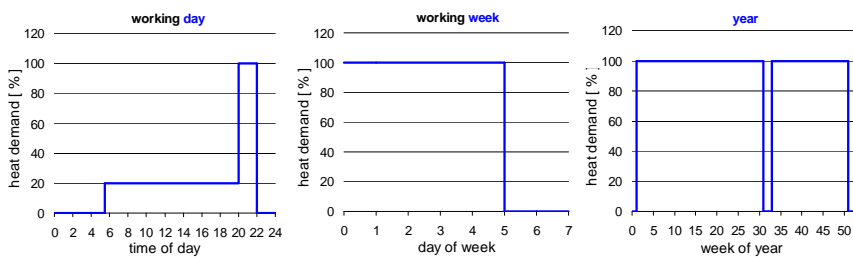

Example for the **discontinuous** load profile of the **hot water demand** for cleaning of production equipment in a medium-sized company.

- Two shifts (5:30 am to 10 pm)
- High demand within the last two hours
- No work at weekends, company holidays in summer and around the turn of the year

12

Example: thermal load and annual heat demand

- For a measured demand of **10 m³ hot water per working day** the heat demand $Q_{\text{working day}}$ can be calculated (simplified):

$$Q_{\text{Working day}} = m_{\text{Working day}} \cdot \bar{c}_p \cdot \Delta T \approx (10,000 \text{ kg} \cdot 4.18 \frac{\text{kJ}}{\text{kg} \cdot \text{K}} \cdot 45 \text{ K}) / 3600 \frac{\text{kJ}}{\text{kWh}} = 522.5 \text{ kWh}$$

- The load profile shows, that between 05:30 and 20:00 the hot water demand is about 408 l / h. Within the last two hours it is 2040 l / h.
- Weekends and company holidays (235 working days out of 365) lead to a mean daily demand of **6,44 m³ per day** and an annual energy demand of this process of **122,8 MWh_{th} / year**.



Which part of this annual demand can be covered by solar thermal in a reasonable way?

13

Pre-dimensioning (rules of thumb for Central Europe)

- Aperture area A_{Ap} :
 - **Method a):** Roof area available as collector aperture area multiplied by estimated solar gains of **500 kWh / (year * m²_{Ap})**
 - **Method b):** Annual thermal energy demand of the processes to be supported by solar multiplied by a **solar fraction of 40 %**, divided by 500 kWh / (year * m²_{Ap})


$$A_{Ap} = (Q_{\text{Year}} \cdot 0.4) / 500 \frac{\text{kWh}}{\text{m}_{Ap}^2} = (122.8 \text{ MWh} \cdot 0.4) / 500 \frac{\text{kWh}}{\text{m}_{Ap}^2} \approx 100 \text{ m}_{Ap}^2$$

- Storage volume V_{Sto} :
 - As a first indication, **50 l_{Sto} / m²_{Ap}** can be assumed:

$$V_{\text{Sto}} = A_{Ap} \cdot 50 \frac{\text{l}}{\text{m}^2} = 100 \text{ m}_{Ap}^2 \cdot 50 \frac{\text{l}}{\text{m}_{Ap}^2} \approx 5 \text{ m}^3$$

14

Simulated nomograms for system design

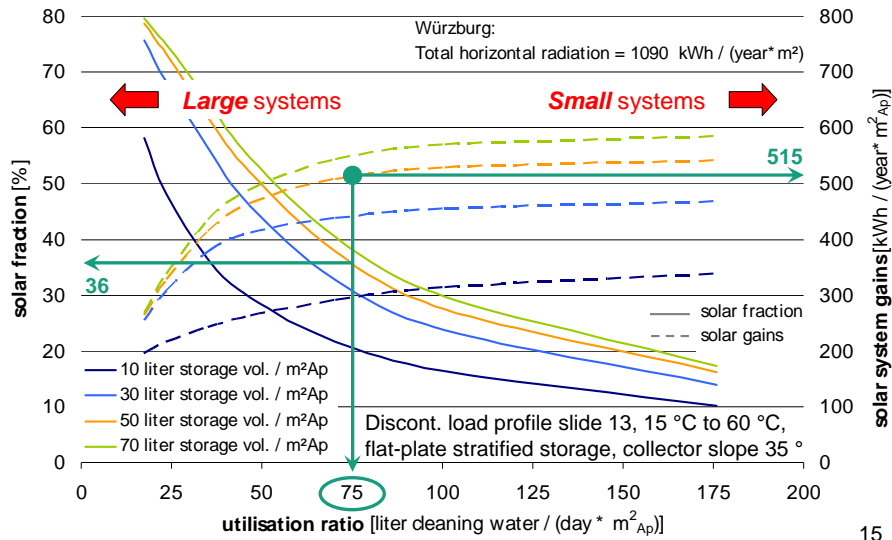

© Fraunhofer ISE

Fraunhofer
ISE

Results for this green design:

- Calculation of the resulting collector aperture area by using the utilization ratio of 75 l hot water per day and m²_{Ap}:

$$A_{Ap} = (6,440 \frac{l WW}{day}) / (75 \frac{l WW}{day * m_{Ap}^2}) \approx 86 m_{Ap}^2$$

- The resulting solar system gains are valid for a storage volume of:

$$V_{Sto} = 50 \frac{l}{m_{Ap}^2} * 86 m_{Ap}^2 \approx 4,300 l$$

- Calculation of the annual solar gains of this system by using:

- specific system gains: $E_{year} = 515 \frac{kWh}{year * m_{Ap}^2} * 86 m_{Ap}^2 \approx 44.3 \frac{MWh}{year}$

- solar fraction: $E_{year} = 122.8 \frac{MWh}{year} * 36 \% \approx 44.2 \frac{MWh}{year}$


16

© Fraunhofer ISE

Fraunhofer
ISE

Variation: A "smaller" system?

Example: demand = 6,440 l / day

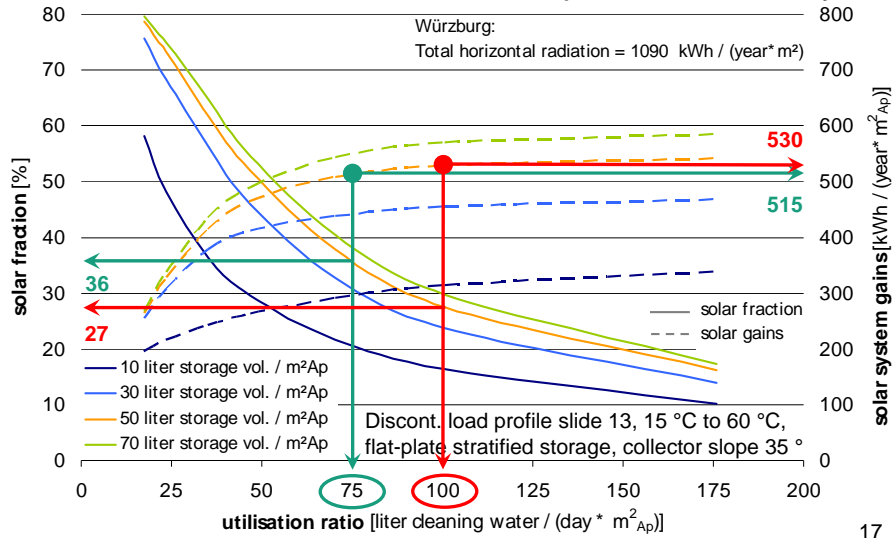


86 m² 64 m²

© Fraunhofer ISE

Fraunhofer ISE

Location Madrid

Example: demand = 6,440 l / day

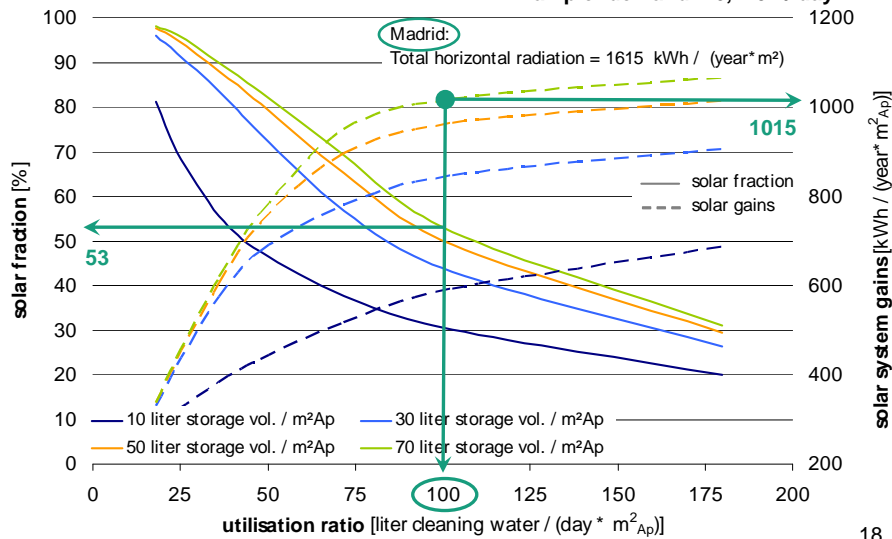

64 m²

© Fraunhofer ISE


Fraunhofer ISE

Agenda

- Background and motivation
- The SO-PRO Design Guide
 - Structure and application of the guide
 - Important terms and values
 - Holistic planning approach
- Example: System design for a washing process
 - Pre-dimensioning with rules of thumb
 - Making use of simulated nomograms
- **Explanation of the other system designs and processes**
- Exercises: Teamwork and discussion of results
- Summary

19

b) Pre-heating of make-up water

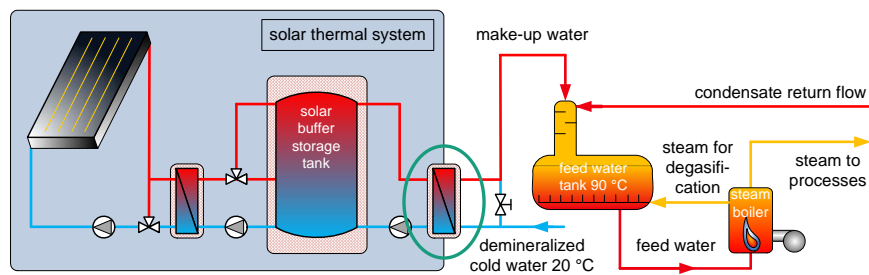


Exemplary system concept for pre-heating the make-up water of a steam process

- High solar gains because of **low temperature** level
- System concept very similar to **conventional** systems for hot water
- Only applicable to (partly) **open steam networks**
- **Heat recovery** has to be analyzed (available temperature can rise)

20

Thermal load profile

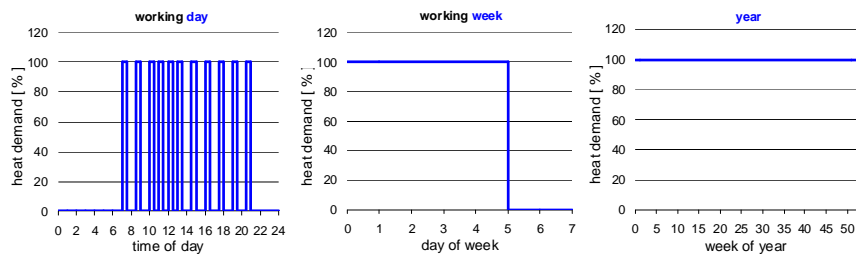


Example for the **make-up water consumption profile** of a partly open steam network in a small laundry.

- Two shifts (5:30 am to 10 pm), weekend, no company holidays
- The fill-level control of the feed-water tank opens for intervals of 30 min

21

c) Heating of baths and vessels

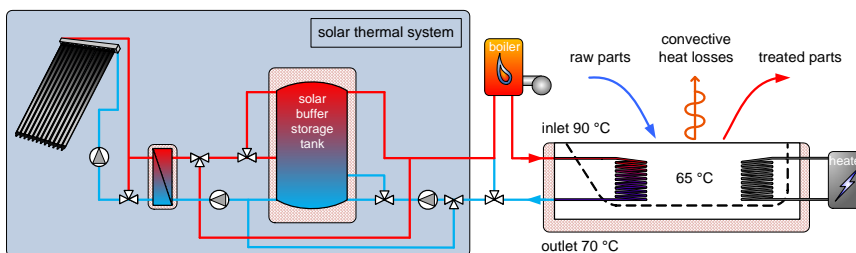


Exemplary system concept for the **solar heating of an industrial bath**. Direct heating of the bath possible by bypassing the storage. The electrical heater is used for temperature control.

- Closed process: **Economics highly depend on the bath temperature**
- Heat recovery from baths with higher temperatures checked?
- Regular refill favorable
- **Small buffer storage volume possible** (bath can act as a storage)

22

Thermal load profile

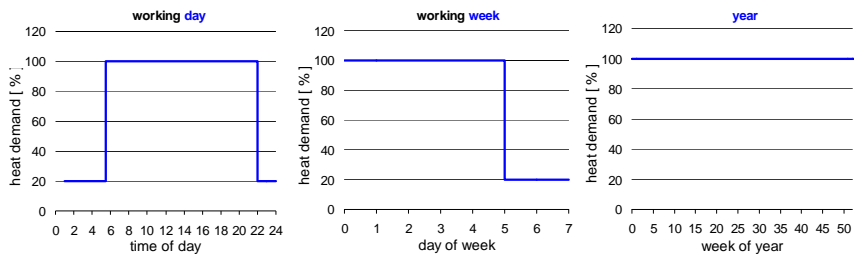


Example for the **continuous heat demand** of an **galvanic bath** in a smaller company

- Electrolyte has to be kept at a certain temperature all the time
- Heat demand at night and at weekends to compensate heat losses
- No work at weekends, no company holidays

23

d) Convective drying with hot air

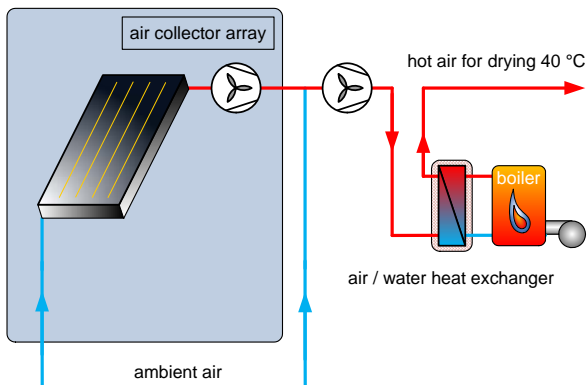

Exemplary system concept of an **open drying process**. The open air collector system is serially supported by a boiler (solar fan left, conventional fan right)

- No storage necessary
- Continuous heat demand favorable
- Efficiency of air collectors decreases with decreasing mass flow

24

Agenda

- Background and motivation
- The SO-PRO Design Guide
 - Structure and application of the guide
 - Important terms and values
 - Holistic planning approach
- Example: System design for a washing process
 - Pre-dimensioning with rules of thumb
 - Making use of simulated nomograms
- Explanation of the other system designs and processes
- **Exercises: Teamwork and discussion of results**
- Summary

25


Teamwork: Conception and Design of a solar thermal system supporting an industrial process

- Exercises on the following pages:
 - Design case 1: Solar heating of a **galvanic bath**
(closed loop, variation of site, collector type and bath temperature)
 - Design case 2: Pre-heating of **feed-water in a laundry**
(discussion of direct / indirect integration of solar heat)
- Procedure:
 - Please form **teams of 2 or 3 persons**
 - **1 pocket calculator** per team is **recommended**
 - Please **do both exercises** and **discuss the results** in your team
(indicate your design points in the nomograms)
 - **Time: 20 min**
 - Results will be explained and are documented in the handout!

26

Design case 1: Solar heating of a galvanic bath

A electro-plating company in Würzburg (Germany) is using 250 kWh / d of thermal energy (annual average, weekends/holidays already considered) to heat a bath. This bath must be kept at a temperature of 45 °C all over the year.

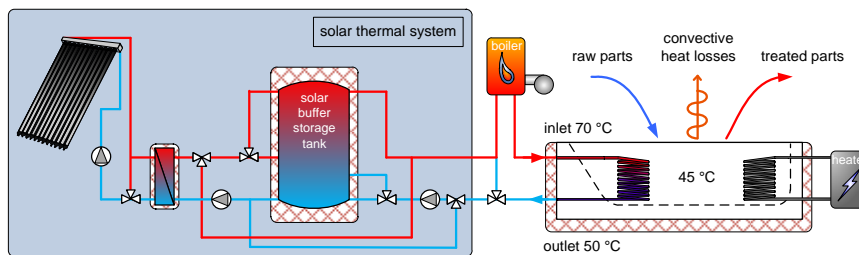

System concept for design case 1

27

Design case 1: Solar heating of a galvanic bath

- 1) Calculate the annual energy demand of this process and estimate aperture area and storage volume of a ST system covering this demand to 40 % (compare slide 14)

$$Q_{Year} = \boxed{} \frac{kWh}{d} \cdot 365 d = \boxed{} kWh$$


$$A_{Ap} = (Q_{Year} \cdot \boxed{}) / \boxed{} \frac{kWh}{m^2} = \left(\boxed{} \frac{kWh}{a} \cdot \boxed{} \right) / \boxed{} \frac{kWh}{a m^2} = \boxed{} m^2$$

$$V_{Sto} = A_{Ap} \cdot \boxed{} \frac{l}{m^2} = \boxed{} m^2 \cdot \boxed{} \frac{l}{m^2} \approx \boxed{} m^3$$

28

Design case 1: Solar heating of a galvanic bath

- 2) Do a more accurate dimensioning of aperture area and storage volume based on the simulation results in the following nomogram. Apply vacuum tube collectors and 50 l / m² storage. Which solar fraction should be selected?

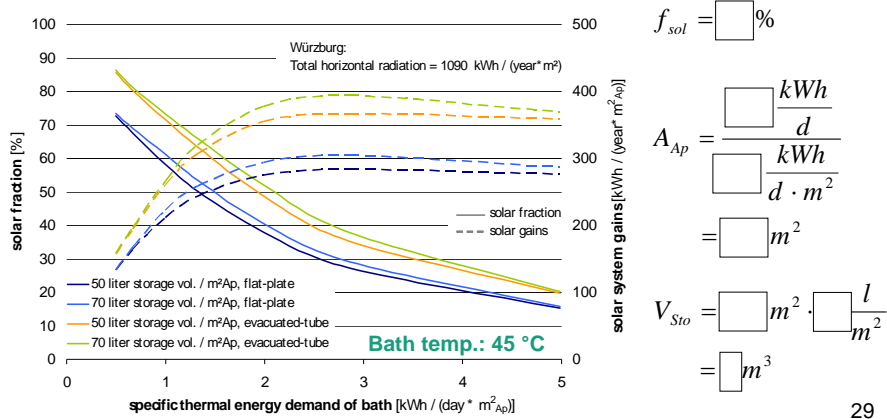


29

Design case 1: Solar heating of a galvanic bath

- 3) How would you assess the same system with a bath temperature of 65 °C? What is the main reason for the low solar gains? Look at the system concept on slide 22!

Reason:

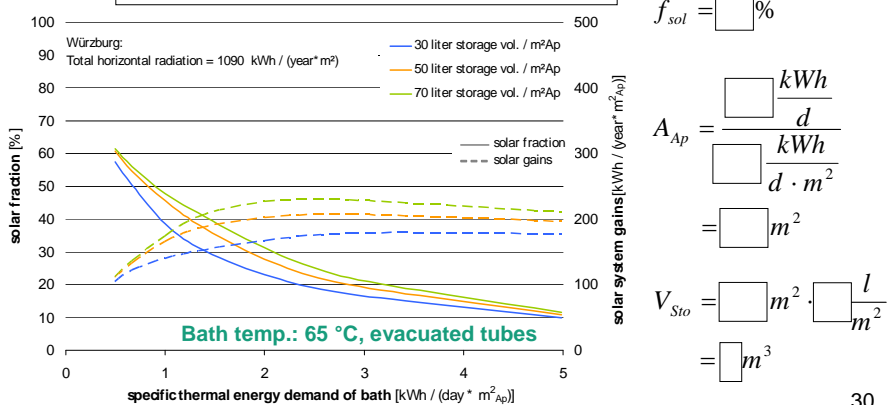


30

Design case 1: Solar heating of a galvanic bath

- 4) Suppose the company would be located in **Madrid**.
How would you design the system for **45 °C** there?

Selected collector type:

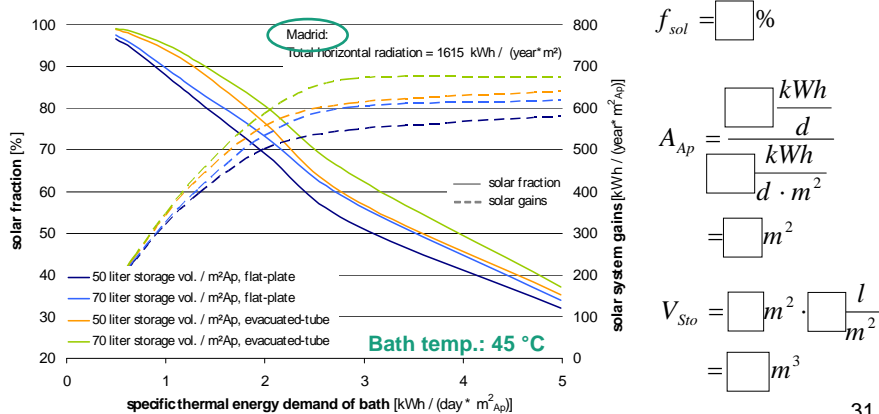


© Fraunhofer ISE

Fraunhofer ISE

Design case 2: Solar heating of make-up water

A laundry in **Würzburg** (no holidays, no work at weekends) runs a steam network with several indirect consumers and a big inline washing machine using the steam directly. Thus, the network needs about 15 tons of make-up water per average day.

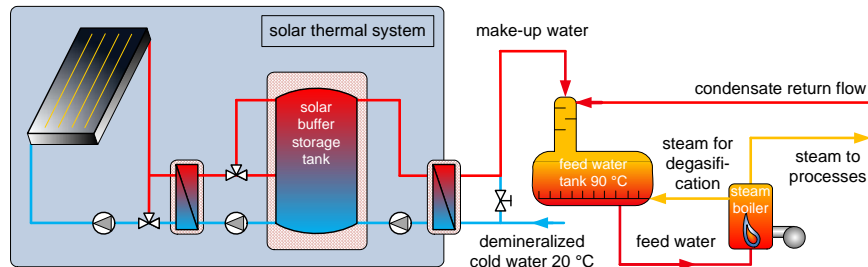


© Fraunhofer ISE

Fraunhofer ISE

Design case 2: Solar heating of make-up water

- 1) Fill in the characteristic values for a medium-sized solar thermal system supporting this process (see indicated design)

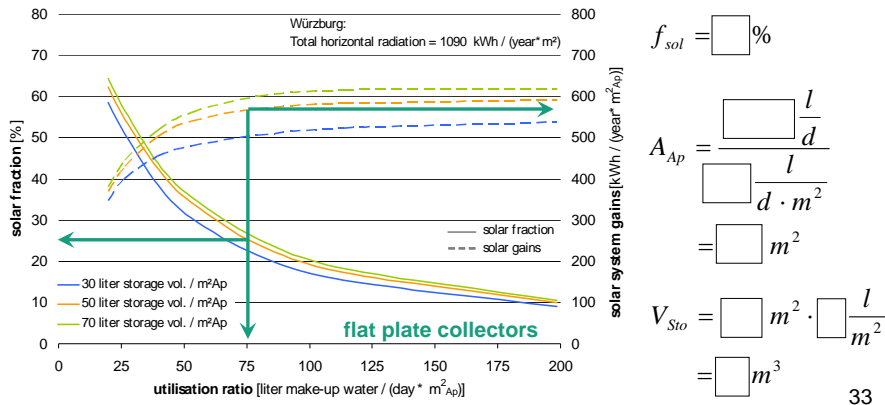

© Fraunhofer ISE

Fraunhofer
ISE

Design case 2: Solar heating of make-up water

- 2) What is the difference in the recommended solar fraction and the solar system gains between make-up water (slide 33, load profile slide 21) and cleaning water (slide 15, load profile slide 12)?

a) Recommended solar fraction:

% for make-up water and % for cleaning water

b) Solar system gains:

kWh / m² for make-up water and kWh / m² for cleaning water

- 3) What is the reason for the different solar fraction?

- 4) Which are the two main reasons for the different solar system gains?

a)

b)


34

© Fraunhofer ISE

Fraunhofer
ISE

Results for case 1: Solar heating of a galvanic bath

A electro-plating company in Würzburg (Germany) is using 250 kWh / d of thermal energy (annual average, weekends/holidays already considered) to heat a bath. This bath must be kept at a temperature of 45 °C all over the year.

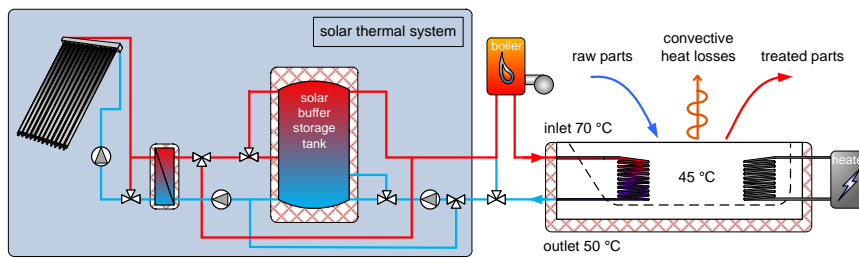

System concept for design case 1

35

Results for case 1: Solar heating of a galvanic bath

- 1) Calculate the annual energy demand of this process and estimate aperture area and storage volume of a ST system covering this demand to 40 %

$$Q_{Year} = 250 \frac{kWh}{d} \cdot 365 d = 91,250 kWh$$


$$A_{Ap} = (Q_{Year} \cdot 0.4) / 500 \frac{kWh}{m_{Ap}^2} = (91,250 \frac{kWh}{a} \cdot 0.4) / 500 \frac{kWh}{a m_{Ap}^2} = 73 m_{Ap}^2$$

$$V_{Sto} = A_{Ap} \cdot 50 \frac{l}{m^2} = 73 m_{Ap}^2 \cdot 50 \frac{l}{m_{Ap}^2} \approx 3.65 m^3$$

36

Results for case 1: Solar heating of a galvanic bath


- 2) Do a more accurate dimensioning of aperture area and storage volume based on the simulation results in the following nomogram. Apply vacuum tube collectors and 50 l / m² storage. Which solar fraction should be selected?

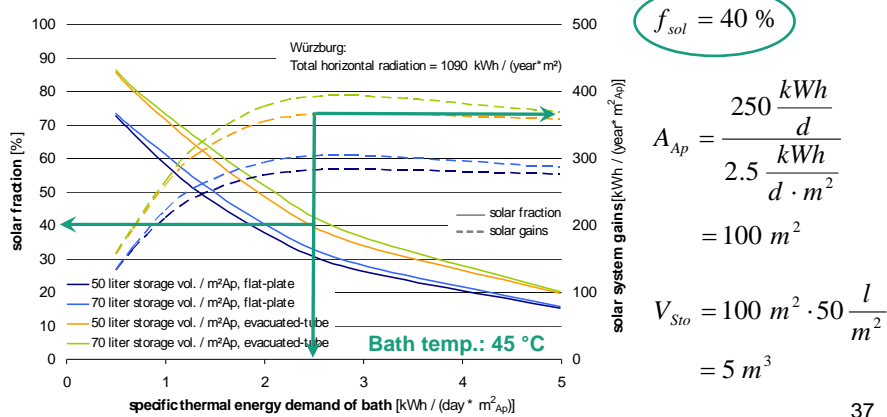

Results for case 1: Solar heating of a galvanic bath

- 3) How would you assess the same system with a bath temperature of 65 °C? What is the main reason for the low solar gains? Look at the system concept on slide 22!


Reason: Available temperature level: 70 °C

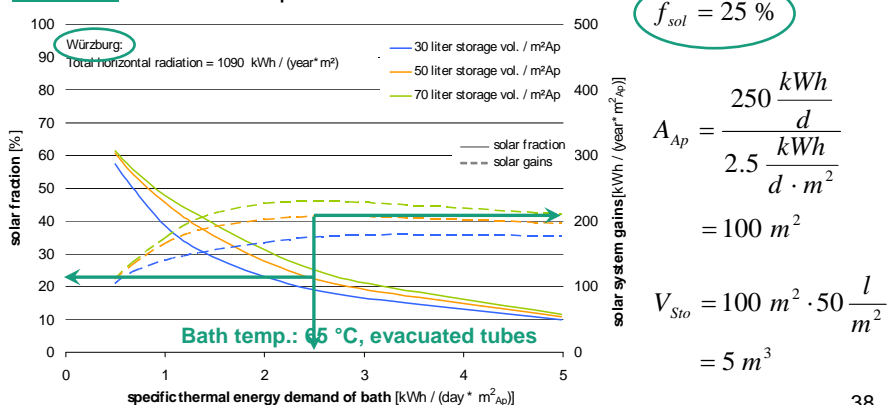

Results for case 1: Solar heating of a galvanic bath

- 4) Suppose the company would be located in **Madrid**.
How would you design the system for **45 °C** there?

Selected collector type: **flat-plate**

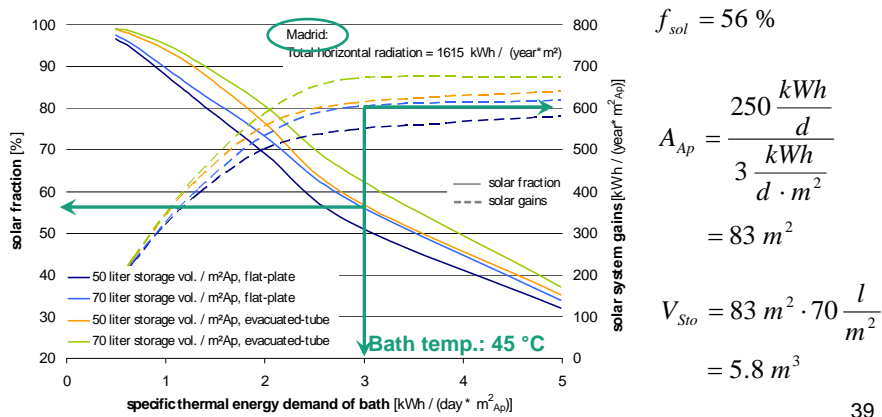


© Fraunhofer ISE

Fraunhofer ISE

Results for case 2: Solar heating of make-up water

A laundry in **Würzburg** (no holidays, no work at weekends) runs a steam network with several indirect consumers and a big inline washing machine using the steam directly. Thus, the network needs about 15 tons of make-up water per average day.

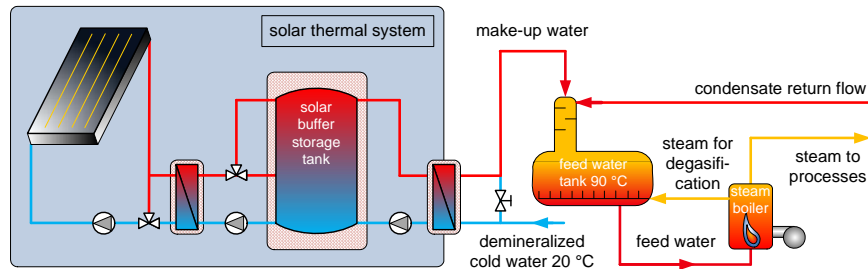

System concept for design case 2


40

© Fraunhofer ISE

Fraunhofer ISE

Results for case 2: Solar heating of make-up water

- 1) Fill in the characteristic values for a medium-sized solar thermal system supporting this process (see indicated design)

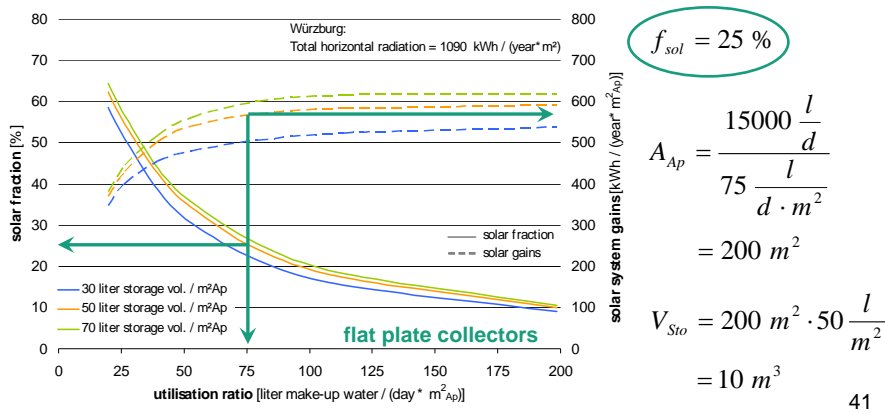

© Fraunhofer ISE

Fraunhofer
ISE

Results for case 2: Solar heating of make-up water

- 2) What is the difference in the recommended solar fraction and the solar system gains between make-up water (slide 33, load profile slide 21) and cleaning water (slide 15, load profile slide 12)?

a) Recommended solar fraction:

25 % for make-up water and 36 % for cleaning water

b) Solar system gains:

570 kWh / m² for make-up water and 515 kWh / m² for cleaning water

- 3) What is the reason for the different solar fraction?

The thermal load is defined up to 60 °C for cleaning water, but up to 90 °C for make-up water.

- 4) Which are the two main reasons for the different solar system gains?

a) The load profile for cleaning shows company holidays.

b) Solar gains above 60 °C can not be used for the cleaning water.

42

© Fraunhofer ISE

Fraunhofer
ISE